




Pneumatic Vibrators For Concrete Consolidation

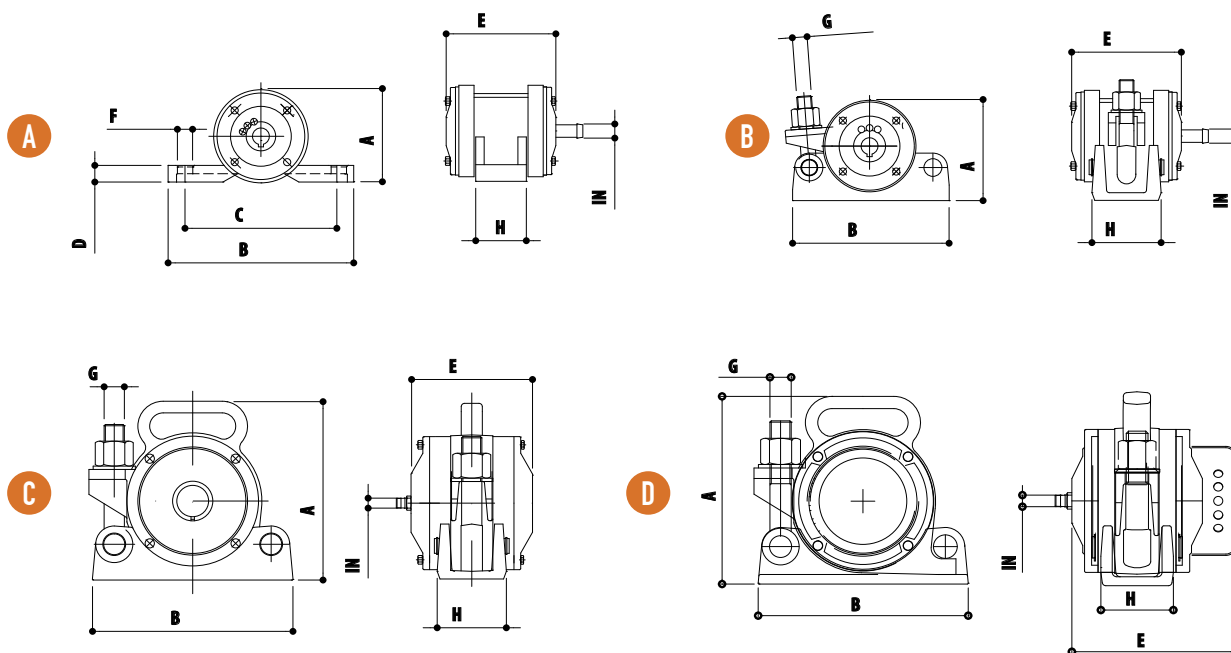

Model	Working pressure [bar]	Vibration [vpm]	Centr. Force [kg]	Air Consump. [l/min]	Noise Level dB (A)	OVERALL DIMENSIONS										
						Drawing	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	IN [mm]	Weight [kg]
HFP 600P	6	17.000	720	1.000	100	A	111	220	180	20	164	20	-	60	15	6.3
HFP 1000P		16.500	1.122	1.100			7.2									
HFP 1400P		16.000	1.453	1.200			7.3									
HFP 600C	6	17.000	720	1.000	100	B	120	180	-	-	164	-	18	94	15	6.3
HFP 1000C		16.500	1.122	1.100			7.2									
HFP 1400C		16.000	1.453	1.200			7.3									
HFP 2700C		16.000	2.753	1.600	103	C	224	238	-	-	160	-	24	84	15	14
HFP 4000C		15.200	4.079	1.800			14.5									
HFP 6000C		14.500	6.118	1.800			16.3									
HFP 4001C	6	10.200	4.079	1.800	90	D	215	240	-	-	180	-	24	84	15	18

PNEUMATIC VIBRATORS FOR CONCRETE CONSOLIDATION

APPLICATION Concrete formworks in situ
Concrete moulds in precast industry

FEATURES

WORKING PRESSURE 6 bar
AIR SUPPLY QUALITY Class 5.4.4
WORKING TEMPERATURE -10°C +60°C
MAX NOISE LEVEL 103 dB(A)
 Silent version HFC 4001C: 90 dB(A) at 1 meter distance
TECHNOLOGY Eccentric rotor
MATERIALS Steel and cast iron

ACCESSORIES Fixing tools:
 CLW (Clamp for Wooden formworks);
 CLS (Clamp for Steel formworks);
 CRS (Cradle for Steel concrete moulds)



*Clamp



*Cradle

This information is furnished without warranty, representation, inducement or license of any kind. It is accurate to the best OLI knowledge or is obtained from sources believed to be accurate. OLI therefore assumes no legal responsibility.